

Floating treatment wetlands mitigate lake eutrophication

By Mark Reinsel

An enhanced floating treatment wetland (FTW) that incorporates air diffuser technology is under evaluation in an ongoing study at Floating Island International in Montana. The latest-generation system lifts and circulates water through floating streambeds within the FTW. This combination of FTW and improved water circulation/aeration is part of a product range called BioHaven®. The primary objective of the study is to determine whether biofilm-based microbes can provide nutrient removal, while increasing fish productivity.

This system, which is a new type of constructed wetland, has been evaluated for treatment of agricultural effluent and municipal wastewater. Cost-effective treatment options for end users with limited funding will be its greatest benefit. It can provide treatment of agricultural-impacted waters, municipal wastewater, stormwater



Figure 1. Fish Fry Lake near Shepherd, Montana.

and polishing of tertiary wastewater, along with lake restoration.

Fisheries managers will be especially interested in the productivity potential afforded by a biological system, which can reduce algae and grow more (and bigger) fish.

Overview

Wetland areas have been reduced worldwide, while nutrient loading has increased with growing human populations. Mass-production agriculture, as practised in many developed nations, can contribute to hyper-eutrophication in water bodies that were previously low in nutrient concentrations. In fresh water, partly as a result of normal seasonal stratification, nutrient loading can deplete oxygen levels within the livable temperature zone for fish species.

Over the last 11 years, Floating Island International (FII) has developed the BioHaven FTW technology, which mimics the ability of natural peat-based wetlands to purify water. The Leviathan™ extrapolates this technology by maximizing surface area and circulation, which are key components of wetland effectiveness. The islands are also designed to provide optimal perennial plant habitat.

pH control
Less sludge MORE OXYGEN



Finding solutions is in our nature

Air Liquide Canada
Michel Épiney: 450-641-6218
Camille Lanctot-Downs: 780-438-5635
airliquide.ca



When it comes to environmental process applications, we're really in our element

At Air Liquide Canada, we're working hard to provide solutions to some of the most important challenges we face today. Our process applications include:

- CO₂ to neutralize pH of alkaline effluents
- O₂ to increase bio-basin oxygenation capacity while decreasing polymer
- O₃ for bio-sludge reduction to reduce sludge handling, nutrient and dewatering polymer

Find out more about how Air Liquide Canada's green approach to process applications is not only good for the planet but good for business too.

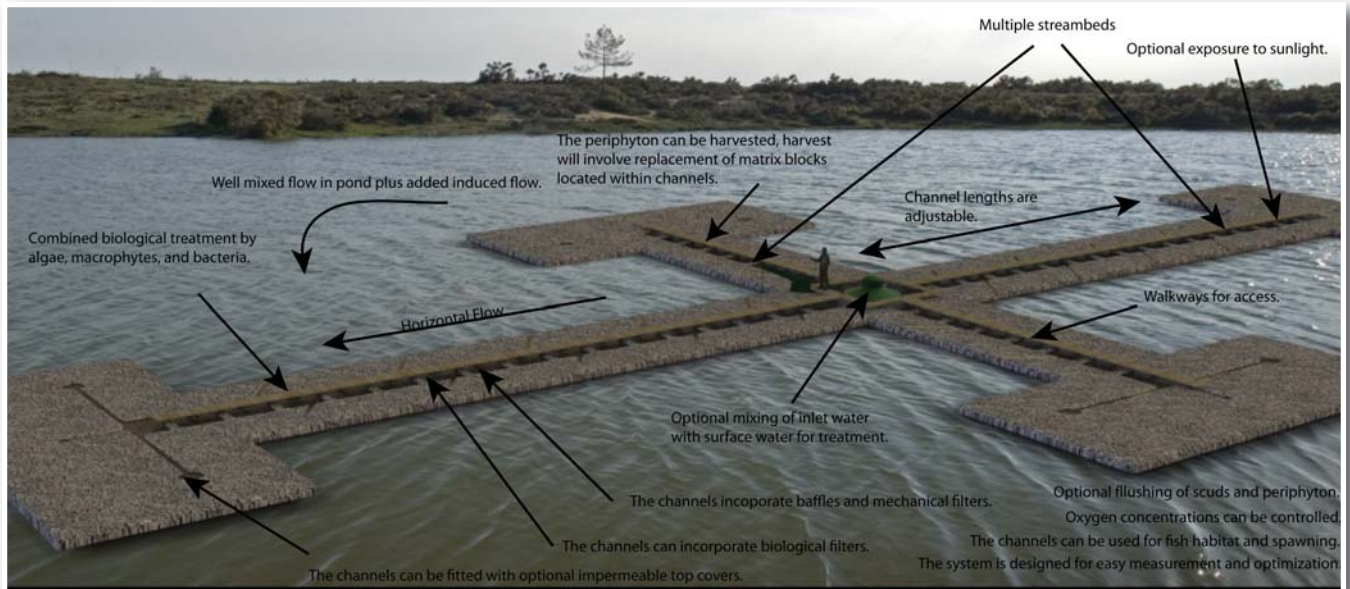


Figure 2. Schematic of Leviathan floating treatment wetland.

System background

Dissolved oxygen and temperature measurements taken on Fish Fry Lake, FII's 6.5-acre research lake in 2008/2009 indicated that stratified water near the surface was too warm to sustain a trout

fishery. While temperatures below the stratified warm water layer were sufficiently cool for trout, that zone contained low dissolved oxygen (DO) levels. During late summer, no strata of water could consistently provide the cold-water, high-

DO environment demanded by fish, such as rainbow, brown and Yellowstone cutthroat trout.

Groundwater containing variable nutrient concentrations enters the lake at an

continued overleaf...

When you're ready to make a greater impact
 When you're ready to go further in your career
 You are ready for American Public University

American Public University is ready to help you move your career forward. We offer respected degrees in Environmental Science, Environmental Policy & Management, and more — completely online. And people are taking notice. We've been nationally recognized by the Sloan Consortium for effective practices in online education, and 99% of employers surveyed would hire one of our graduates again.*

When you're ready, visit StudyatAPU.com/ese



*APUS Alumni Employer Survey, March 2006-September 2010
 We want you to make a fully informed decision about the university that's right for you. For more about our graduation rates, the median debt of students who completed each program, and other important information, visit www.apus.edu/disclosure.



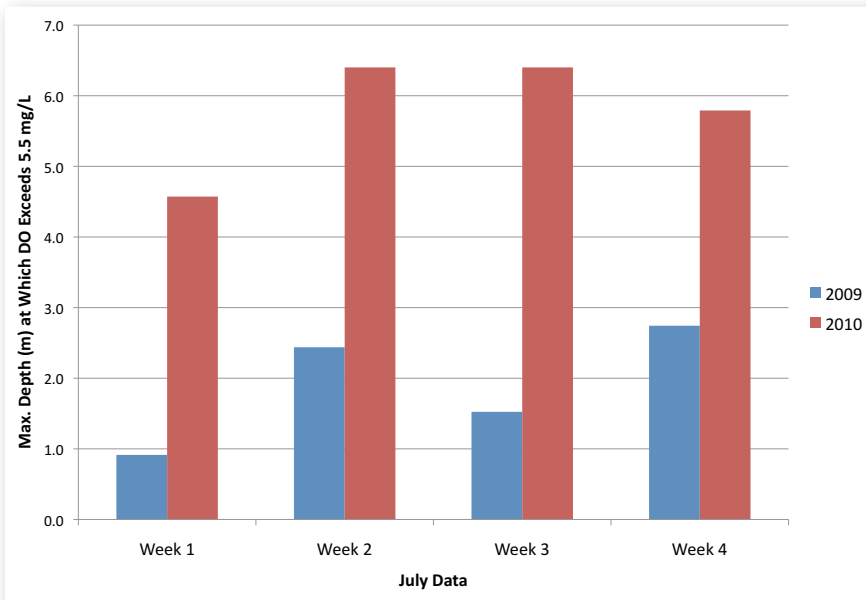


Figure 3. Dissolved oxygen and temperature gradients at Fish Fry Lake, before (2009) and after (2010) Leviathan implementation.

estimated average rate of 18 m³/hr. Surface water also flows into the lake with variable nutrient concentrations and flow rates. Evaporative loss and outflow are balanced to maintain the lake level, which is approximately 9 m deep.

As the lake was filled several years ago, a series of BioHaven floating islands covering 5,200 square feet (480 m²) of lake area and providing over 9.3 ha of saturated surface area was installed. Several islands were positioned next to the inflow

to maximize exposure to the highest nutrient concentrations. These islands were designed to maximize production of biofilm (organisms attached to underwater surfaces), and to move nutrients into and through the food web.

After addition of the last 232-m² FTW, floating islands now cover approximately 715 m², or 2.7% of the lake's surface area.

Active treatment system with floating streambed

Leviathan is an enhanced form of constructed wetland, and is FII's latest effort to move excess nutrients into the food chain or harvest them. It integrates high-volume, low-pressure circulation with matrix surface area constructed of post-consumer (recycled) polymer fibers, for maximum wetland performance. Air-driven directional diffusers circulate up to 2,300 m³/hr, pushing it through the BioHaven matrix and plant roots.

The system's floating streambed contributes to aeration and nutrient uptake. The FPZ-brand air diffusers require 3 hp (2.2 kW) to operate, typically with 230V single-phase power.

Leviathan is designed to provide the

the Waterra

FHT-45 High Turbidity Filter

The **Waterra FHT-45** high turbidity filter offers the most surface area available in a capsule designed specifically for groundwater monitoring.

features

- SMALL LOTS, PRE-CERTIFIED BY ICPMs
- HIGH VOID VOLUME FOR LONG FILTER LIFE
- MOLDED COMPOUND INLET IS STANDARD
- HIGH QUALITY POLYETHERSULPHONE 0.45 FILTER MEDIA
- UNIQUE OPEN PLEAT GEOMETRY FOR MAXIMUM MEDIA EXPOSURE
- EACH FILTER IS PRE-RINSED WITH ONE LITRE OF DE-IONIZED WATER
- MEDIUM TURBIDITY WATERRA FMT-45 & 0.2 MICRON CAP300X2 ALSO AVAILABLE



waterra
www.waterra.com

DISPOSABLE FILTERS
greater capacity

(CANADA) Waterra Pumps Limited sales@waterra.com • tel: 905.238.5242 (USA) Waterra USA Inc. waterra@openaccess.org • tel: 360.738.3366

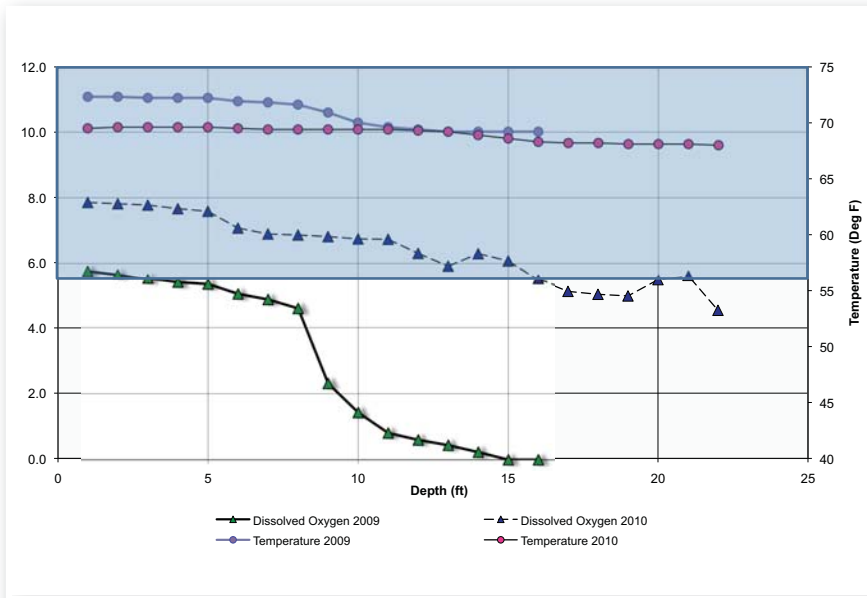


Figure 4. Maximum livable depth for Yellowstone cutthroat trout at Fish Fry Lake, before and after Leviathan implementation.

complete “wetland effect,” including aerobic, anaerobic and anoxic microbial nutrient conversion. This allows it to treat large, nutrient-rich stratified bodies of water, including “dead zones,” in both freshwater and marine settings. Removal of ammonia, nitrate, phosphate and soluble organic carbon has been demonstrated.

The system can move nutrients from any depth into and through the islands’ biologically active substrate. In the process, these nutrients are digested by beneficial microbes and form periphyton (attached plant and animal organisms embedded in a polysaccharide matrix, similar to biofilm), which is the base of the freshwater food chain. As these excess nutrients transition into the food chain via biofilm/periphyton, both water quality and fish growth rates can be dramatically improved.

Leviathan can de-stratify water bodies, resulting in greatly expanded habitable zones for targeted fish species. As part of this process, high DO levels can be achieved and maintained, and water temperatures homogenized.

Results

A 232-m² Leviathan system, incorporating floating streambeds and grid-powered water circulation, was installed in the lake in April 2009. This system circulated up to 770 m³/hr through the stream channels within the island. Each cubic meter of Leviathan’s matrix, averaging 0.64 m in thickness, provided 820 square

meters of surface area.

After 17 months of operation, water clarity had improved from a low of 0.36 m of visibility to as much as 3.3 m. Clarity is now at 5.8 m. Simultaneously, the water temperature gradient was reduced, creating a larger zone of “livable” water for fish. Two age classes of Yellowstone cutthroat trout were introduced 13 and 14 months into the test. Through the summer of 2010, a favorable temperature/dissolved oxygen strata, ranging from the water surface down to a depth of at least 3.7 m, was maintained as potential cutthroat trout habitat.

One-year-old and two-year-old black crappie were also introduced two months into the test, and naturally-occurring northern yellow perch were present in the lake when it was filled. All three species have flourished.

The new aeration scheme in the lake improves water quality by incorporating dissolved phosphorus and nitrogen into the aquatic food web, in the form of periphyton, while limiting the growth of deleterious algae. Total phosphate concentrations are reduced from about 0.04 mg/L to 0.02 mg/L, while nitrate-nitrogen concentrations decrease from about 0.6 mg/L to 0.01 mg/L.

Fish Fry Lake is relatively unique in that it supports fish accustomed to cold water (Yellowstone cutthroat trout), temperate water (perch) and warm water (crappie). Montana officials have made

two unsuccessful attempts at sustaining cutthroat populations in an adjacent stretch of the Yellowstone River.

Fish catch rates and growth rates are now being monitored at the lake. Initial data show that experienced fishermen catch an average of one perch every two minutes. Visual observations from diving and an underwater viewing station indicate that perch approaching or exceeding the Montana state record of 1.0 kg now inhabit the lake.

The perch harvest at Fish Fry Lake averaged 12 kg of fish per week from May–November 2011. With a phosphorus content of 0.9% in perch, phosphorus removal from the lake via fishing averaged 0.10 kg/wk, or 84% of the estimated phosphorus input to the lake.

In summary, Fish Fry Lake was poised to become another eutrophic waterway, until a new form of applied stewardship was introduced, which reversed the process.

Mark Reinsel is with Apex Engineering.
E-mail: mark@apexengineering.us

Neptune™ Polymaster™ Polymer Makedown System



The Polymaster dilutes, mixes and thoroughly activates emulsion, dispersion and solution polymers, including the new lines of high-molecular-weight products. The heart of the Polymaster system is the patented Gatlin motorized mixing chamber, which hydraulically segments polymer into ultra-thin film platelets that maximize the amount of polymer area that is exposed to dilution water. Other features include: speeds from 1/3 to 20 gpm; easy access to all components; manual or automatic operation; and 120 VAC single-phase power usage.

Neptune Chemical Pump Co.
295 DeKalb Pike, North Wales, PA
Tel: 888-3NEPTUNE or 215-699-8700
Fax: 1-800-255-4017
E-Mail: info@neptune1.com
www.neptune1.com